

265 Series Control Valve



Features:

- ✓ Exclusive NSF Certified electronic control valve with reliable piston, seal and spacer design
- ✓ Remote mount control pad with optional 3 foot cable extension (#60010045) plus manual index option for simple operation
- ✓ Reliable and precise electronic sensors to determine piston positions
- ✓ Simple user friendly LCD display shows time of day, regeneration mode and gallons remaining
- ✓ "Totalizer" function tracks total amount of water treated
- ✓ 48 hour battery back-up keeps time-of-day stored while program settings are kept in permanent memory
- ✓ No confusing codes or symbols to remember
- ✓ Meter Immediate, Meter Delayed, Meter with Day Override, Vacation and Calendar Clock modes
- ✓ Fully adjustable cycle times
- ✓ Unique bypass with integrated space saving turbine meter and sample port on the inlet. One piece design avoids meter jamming.
- ✓ Time saving quick connections for easy installation and maintenance
- ✓ Five Year Guarantee

| Item # | Description |
|----------|--|
| 10010005 | 265 ELECTRONIC METER-BLACK COVER |
| 10020005 | 265 ELECTRONIC METER-FILTER, BLACK COVER |

| Specifications | |
|--------------------------------------|--------------------------------------|
| Valve Body Material | Noryl (PPO) |
| Plumbing Connections (NPT) | Straight – ½", ¾", 1" 90 Deg – ¾" |
| Tank Thread | 2-1/2" NPSM |
| Adjustable Cycles | 0 - 99 minutes |
| Regeneration | Down Flow |
| Meter Accuracy | +/-5% |
| Maximum Meter Capacity | 9,999 GAL |
| Distributor Pilot | 1.05" |
| Drain Line | 1/2" Quick Connect |
| Brine Line | 3/8" Quick Connect |
| Flow Rates (Valve Only 50 psi inlet) | |
| Continuous (15 psi drop) | 20 GPM |
| Peak (25 psi drop) | 26 GPM |
| Max. Backwash (25 psi drop) | 7 GPM |
| Cv | 5.2 |
| Typical Applications | |
| Softeners | up to 16" Diameter |
| Filters | up to 10" Diameter |
| Electrical | |
| Input | 110V AC 50/60Hz |
| Output | 12V AC 50/60Hz 410mA |
| Certification | cUL |
| Operation Ratings | |
| Max. Working Pressure | 20 - 125 psi |
| Max. Temperature | 34F - 110F |
| Approvals | |
| NSF | Certified |
| Additional Information | |
| Shipping Weight | 7 pounds |



QC Power Cable




QC Brine Line



QC Drain Line



Integrated Meter

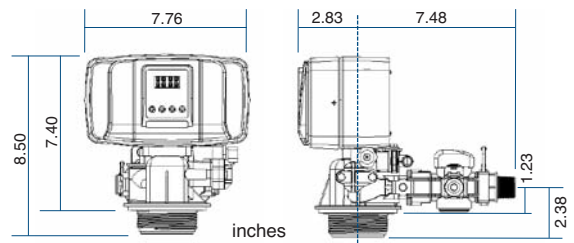

AQUATECH

"The Water Specialists"



Healthy Living Begins With Clean Water

1-800-265-0294

www.aquatech-canada.ca