

Fibreglass Pressure Tanks

Canature NSF Certified filament wound tanks are not only the strongest and most reliable in the industry but the neatly wound, high-gloss finish is unparalleled. Strict tank height control tolerances mean no surprises when installing a duplex system.

Tanks ordered as a component can also come filled with high quality WQA approved resin, saving you money on freight.





The Industries Most Impressive Pressure Tank!







With over 750,000 tanks without a failure we know that our tanks perform in the field! Imagine never having to deal with another leaky tank! Tank liners are blow-molded from high quality, high strength engineering materials.


The Canature NSF Certified fibreglass reinforced pressure tank is designed to eliminate any potential leaks since there are no welds, joints, or seams in the tank liner. Failures from “cracked collars” are 100% eliminated.

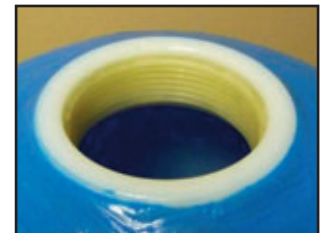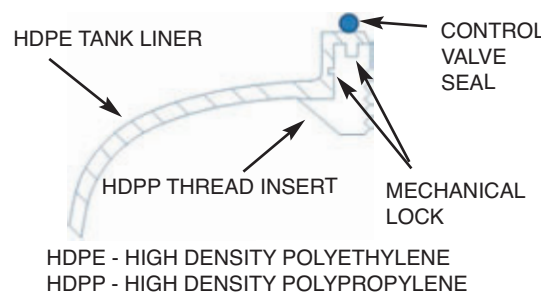

Each tank is wrapped with miles of continuous high strength glass rovings with the most advanced computer aided winding equipment in the world! Canature tanks offer unmatched strength, durability and resistance to temperature and corrosion. Our tanks are built to surpass all NSF criteria:

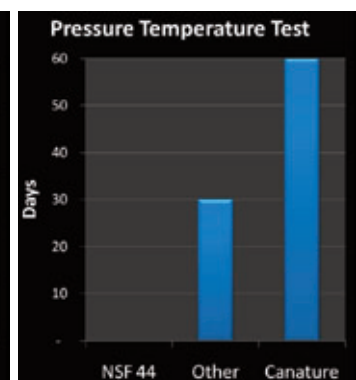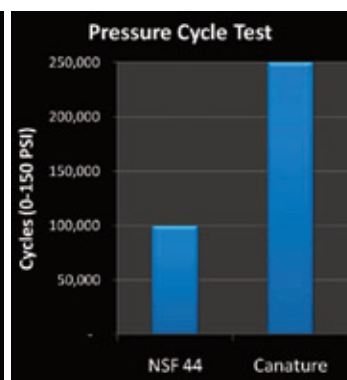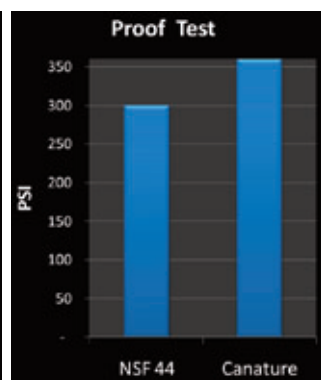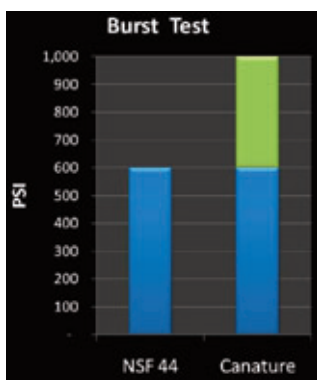

SIZE	VOLUME			WEIGHT (lbs)	TOP OPENING	DIMENSION (in)			
	Litres	Cubic ft	Gallons			La	Lb	Da	Db
05x17	3.8	0.13	1.01	2.6	2.5"	16.69	16.69	4.80	5.06
05X20	4.5	0.16	1.19	3.0	2.5"	20.30	20.30	4.80	5.06
07X13	6.3	0.22	1.67	2.7	2.5"	13.19	13.03	7.17	7.48
07X17	8.5	0.30	2.25	3.2	2.5"	17.20	17.01	7.17	7.48
07x19	9.7	0.34	2.57	4.7	2.5"	19.21	19.06	7.17	7.48
07x30	15.8	0.55	4.18	5.9	2.5"	30.24	30.04	7.17	7.48
07X35	19.1	0.67	5.05	5.9	2.5"	35.28	35.08	7.17	7.48
07X44	24.3	0.86	6.43	7.5	2.5"	44.21	44.01	7.17	7.48
08X15	9.3	0.33	2.46	3.3	2.5"	15.16	15.00	8.07	8.46
08x17	10.5	0.37	2.78	4.3	2.5"	17.20	17.01	8.07	8.46
08X18	11.5	0.41	3.04	5.6	2.5"	18.19	18.03	8.07	8.46
08X24	16.6	0.59	4.39	6.5	2.5"	24.21	24.02	8.07	8.46
08X26	18.1	0.64	4.79	7.0	2.5"	26.18	26.02	8.07	8.46
08X30	21.0	0.74	5.56	8.1	2.5"	30.31	30.12	8.07	8.46
08x35	23.6	0.83	6.24	8.2	2.5"	35.31	35.08	8.07	8.46
08x44	31.3	1.11	8.28	9.1	2.5"	44.17	44.02	8.07	8.46
09x35	31.6	1.12	8.36	9.1	2.5"	35.35	35.08	9.13	9.53
09x42	38.5	1.36	10.19	10.2	2.5"	42.28	42.00	9.13	9.53
09x48	44.6	1.58	11.80	11.7	2.5"	48.35	48.07	9.13	9.53
10x15	14.0	0.49	3.70	4.4	2.5"	15.12	15.00	10.04	10.55
10x17	16.5	0.58	4.37	5.4	2.5"	17.09	16.97	10.04	10.55
10X24	24.8	0.87	6.56	8.6	2.5"	23.98	23.86	10.04	10.55
10X26	27.3	0.96	7.23	9.0	2.5"	26.14	26.02	10.04	10.55
10X30	32.3	1.14	8.54	10.4	2.5"	30.12	30.04	10.04	10.55
10x35	38.3	1.35	10.13	9.6	2.5"	35.16	35.08	10.04	10.55
10x44	48.8	1.72	12.91	12.4	2.5"	44.13	44.02	10.04	10.55
10x47	53.2	1.87	14.07	14.5	2.5"	47.17	47.05	10.04	10.55
10x54	61.0	2.16	16.14	15.7	2.5"	54.37	54.25	10.04	10.55
11X35	46.7	1.65	12.35	12.8	2.5"	35.55	35.08	11.14	11.61
11X44	59.8	2.11	15.82	15.2	2.5"	44.49	44.02	11.14	11.61
12X48	78.5	2.77	20.78	17.8	2.5"	48.50	47.95	12.09	12.40
12x52	84.7	2.99	22.41	16.8	2.5"	52.68	52.13	12.09	12.40
11X35	46.7	1.65	12.35	12.8	2.5"	35.55	35.08	11.14	11.61
11X44	59.8	2.11	15.82	15.2	2.5"	44.49	44.02	11.14	11.61
13x44	84.8	3.00	22.43	15.9	2.5"	45.08	44.53	13.19	13.74
13x54	105.7	3.73	27.96	21.0	2.5"	55.04	54.49	13.19	13.74
14X52	115.0	4.06	30.42	24.1	2.5"	52.91	50.94	14.29	14.37
14X52	115.0	4.06	30.42	24.1	4.0"	52.91	50.94	14.29	14.37
14x65	148.0	5.23	39.15	32.7	2.5"	65.90	65.78	14.29	14.37
14x65	148.0	5.23	39.15	32.7	4.0"	65.90	65.78	14.29	14.37
16X24	57.0	2.01	15.07	25.0	2.5"	24.57	22.52	16.25	16.37
16X24	57.0	2.01	15.07	25.0	4.0"	24.61	22.56	16.25	16.37
16X36	98.1	3.46	25.95	29.8	2.5"	38.11	36.14	16.25	16.37
16X36	98.1	3.46	25.95	29.8	4.0"	38.19	36.22	16.25	16.37
16X44	131.6	4.65	34.81	36.3	2.5"	48.82	46.93	16.25	16.37
16X44	131.6	4.65	34.81	36.3	4.0"	48.82	46.85	16.25	16.37
16X52	148.3	5.24	39.23	43.0	2.5"	54.21	52.24	16.25	16.37
16X52	148.3	5.24	39.23	43.0	4.0"	54.13	52.17	16.25	16.37
16x65	194.0	6.86	51.32	67.4	4.0"	65.80	65.60	16.25	16.37
18X36	138.0	4.87	36.51	54.8	4.0"	39.37	36.97	18.03	18.03
18X53	211.0	7.45	55.82	12.7	4.0"	56.38	53.94	18.03	18.03
18x65	261.0	9.51	69.05	67.4	4.0"	67.80	67.60	18.03	18.03
21X36	164.0	5.79	43.39	66.5	4.0"	39.45	37.64	20.31	21.85
21X53	2553.0	8.93	675.40	72.5	4.0"	67.76	65.94	20.31	21.85
21x62	344.0	12.16	91.01	78.5	4.0"	67.80	67.60	20.31	21.85
24x72	473.0	16.71	125.13	119.8	4.0"	75.50	75.30	23.38	24.64
30x72	697.0	24.60	184.39	200.0	4.0"	72.30	72.10	30.74	30.94
36x72	1011.0	35.70	267.46	271.4	4.0"	73.07	72.90	36.80	36.93



Features:

- Blow-molded polyethylene liner wound with high performance fibreglass/epoxy
- Complete seamless molding technology
- Threaded inlet made from 30% glass filled PP for superior strength
- 1/3 the weight of steel tanks
- Attractive high-gloss finish
- Corrosion resistant
- Strict dimension tolerances
- NSF Certified
- 10 Year Warranty
- Solvent free central tube with spun weld collector eliminates use of glue and solvents
- Available in Natural, Black and Blue

Save on Freight

Why ship air? Order tanks filled with 8% cross-linked WQA approved resin



Spill Proof Shipping Cap